


Les guides chaînes et rails sont livrés en longueur de 2 mètres. Possibilité de réalisation de longueurs spéciales sur demande.


MS

Référence	ISO	Pas	W	H	A	h	Kg/m
MS-1	08B-1	9.525	15	10	5.5	1.5	0.135
MS-2	08B-1	12.7	20	10	7.5	2.2	0.165
MS-215	08B-1	12.7	20	15	7.5	2.2	0.260
MS-220	08B-1	12.7	20	20	7.4	2.2	0.350
MS-3	10B-1	15.875	20	10	9.3	2.6	0.160
MS-315	10B-1	15.875	20	15	9.3	2.6	0.260
MS-320	10B-1	15.875	20	20	9.3	2.6	0.350
MS-4	12B-1	19.05	25	10	11.3	2.4	0.210
MS-415	12B-1	19.05	25	15	11.3	2.4	0.325
MS-420	12B-1	19.05	25	20	11.3	2.4	0.440
MS-5	16B-1	25.4	40	15	16.5	3.5	0.470
MS-520	16B-1	25.4	40	20	16.5	3.5	0.660
MS-6	20B-1	31.75	45	15	19	4.3	0.530
MS-620	20B-1	31.75	45	20	19	4.3	0.720
MS-7	24B-1	38.1	60	15	24.7	5.5	0.785
MS-8	28B-1	44.45	75	20	30.1	6.8	1.130
MS-9	32B-1	50.8	85	20	30.1	7.7	1.210




MD

Référence	ISO	Pas	W	H	A	h	B	Kg/m
MD-1	08B-2	9.525	25	10	5.5	1.5	15.70	0.230
MD-2	08B-2	12.7	35	10	7.5	2.2	21.4	0.306
MD-215	08B-2	12.7	35	15	7.5	2.2	21.4	0.530
MD-3	10B-2	15.875	40	10	9.3	2.6	25.9	0.344
MD-315	10B-2	15.875	40	15	9.3	2.6	26	0.524
MD-4	12B-2	19.05	45	10	11.3	2.4	30.8	0.396
MD-415	12B-2	19.05	45	15	11.3	2.4	31	0.598
MD-5	16B-2	25.4	65	15	16.5	3.5	48	0.863
MD-520	16B-2	25.4	65	20	16.5	3.5	48	1.156
MD-6	20B-2	31.75	70	15	19	4.3	54.5	0.912
MD-620	20B-2	31.75	70	20	19	4.3	54.5	1.232
MD-7	24B-2	38.1	88	20	24.6	5.6	72	1.499
MD-8	28B-2	44.45	105	20	30	6.9	89	1.790
MD-9	32B-2	50.8	105	20	30	7.8	89	1.750







MT

Référence	ISO	Pas	W	H	A	h	B	Kg/m
MT-1	08B-3	9.525	35	10	5.5	1.5	25.9	0.306
MT-2	08B-3	12.7	45	10	7.5	2.2	35.3	0.381
MT-215	08B-3	12.7	45	15	7.5	2.2	35.3	0.595
MT-220	08B-3	12.7	45	20	7.5	2.2	35.3	0.808
MT-3	10B-3	15.875	55	10	9.3	2.6	42.5	0.455
MT-4	12B-3	19.05	65	10	11.3	2.4	50.3	0.546
MT-5	16B-3	25.4	85	15	16.5	3.5	80.3	1.167
MT-6	20B-3	31.75	105	15	19	4.2	92.0	1.304
MT-7	24B-3	38.1	135	20	24.7	5.5	121.5	2.247
MT-8	28B-3	44.45	170	25	30.1	6.8	149.3	3.522
MT-9	32B-3	50.8	170	30	30.1	7.7	149.3	4.262



MU & MUCG



Référence	ISO	PAS	W	H	C	h	J	d	K	Profil	Kg/m
MU-1	08B-1	9.525	20	15	9.2	4.2	2.8	3.7			0.257
MU-2	08B-1	12.7	25	15	12.7	4.8	3.5	4.9			0.308
MU-3	10B-1	15.875	25	15	15.2	5.1	3.6	5.5			0.296
MU-4	12B-1	19.05	25	20	16.7	5.7	3.9	6.2			0.403
MU-5	16B-1	25.4	35	25	24.4	9.9	8.4	8.9			0.624
MUCG-1	08B-1	9.525	25	15	9.2	4.2	2.8	4	15	C2010	0.720
MUCG-2	08B-1	12.7	25	15	12.7	4.8	3.5	5	22	C2812	1.140
MUCG-3	10B-1	15.875	25	15	15.2	5.1	3.6	6	22	C2812	1.130
MUCG-4	12B-1	19.05	25	20	16.7	5.7	3.9	7	27	C2812	1.270
MUCG-5	16B-1	25.4	35	25	24.4	10	8.4	9	33	C3818	2.030



Les guides chaînes et rails sont livrés en longueur de 2 mètres. Possibilité de réalisation de longueurs spéciales sur demande.



MTCG

Référence	ISO	Pas	W	N	H	K	h	A	Profil	Kg/m
MTCG-1	08B-1	9.525	20		15	17	1.5	5.4	C2010	0.620
MTCG-2	08B-1	12.7	20	17	15	17	2.2	7.5	C2010	0.685
MTCG-3	10B-1	15.875	20	17	15	17	2.6	9.3	C2010	0.700
MTCG-4	12B-1	19.05	28	23.5	15	18	2.4	11.3	C2812	1.170
MTCG-4/20	12B-1	19.05	20	20	15	17	2.4	11.3	C2010	0.830
MTCG-5	16B-1	25.4	28	23.5	15	18	3.5	16.5	C2812	2.245
MTCG-6	20B-1	31.75	38		25	30	4.3	19	C3818	2.305
MTCG-7	24B-1	38.1	38		25	30	5.6	24.6	C3818	2.390
MTCG-8	28B-1	44.45	38		25	30	6.9	30	C3818	2.410
MTCG-9	32B-1	50.8	38		25	30	7.8	30	C3818	2.480







MUC & MUCD

Référence	ISO	Pas	W	H	L	h	A	S	B	Kg/m
MUC-1	08B-1	9.525	25	10	15	1.5	5.4	4.4		0.170
MUC-2	08B-1	12.7	30	15	20	2.2	7.4	7.2		0.275
MUC-3	10B-1	15.875	33	20	23	2.6	9.2	9.5		0.405
MUC-4	12B-1	19.05	38	20	28	2.4	11.3	11.2		0.410
MUC-5	16B-1	25.4	51	25	41	3.5	16.5	16.5		0.510
MUCD-1	08B-2	9.525	36	15	26	1.5	5.4	4.4	16	0.390
MUCD-2	08B-2	12.7	45	20	35	2.2	7.4	7.2	21	0.620
MUCD-3	10B-2	15.875	50	25	40	2.6	9.2	9.5	26	0.816
MUCD-4	12B-2	19.05	56	25	46	2.4	11.3	11.1	31	0.810
MUCD-5	16B-2	25.4	85	30	75	3.5	16.5	16.5	48	1.200

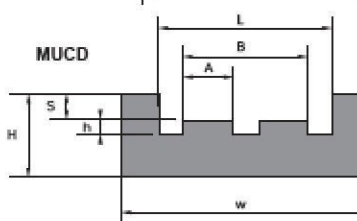



MGH & MGHCG

Référence	ISO	Pas	W	H	C	h	I	d	J	Profil	Kg/m
MGH-1	08B-1	9.525	20	25	9.3	9.9	5.5	4	8.7		0.414
MGH-2	08B-1	12.7	24	30	12.8	12.7	7.5	5	11.5		0.564
MGH-3	10B-1	15.875	30	35	15.4	14.8	9.3	6	13.5		0.832
MGH-4	12B-1	19.05	40	35	16.9	17.5	11.3	7.9	15.9		1.106
MGH-5	16B-1	25.4	40	45	24.4	27	16.5	9	25.7		1.231
MGH-6	20B-1	31.75	50	50	27.5	32	19.3	11	30		1.726
MGH-7	24B-1	38.1	60	60	36.5	40.1	25.2	16	38.2		2.332
MGH-8	28B-1	44.45	60	70	41.5	48.9	30.1	17	46.9		3.173
MGH-9	32B-1	50.8	70	75	44.5	53	30.1	19	47.3		3.264
MGHCG-1	08B-1	9.525	30	24			5.6			C3024	2.150
MGHCG-2	08B-1	12.7	30	24			7.6			C3024	2.150
MGHCG-2E	08B-1	12.7	28	16			7.6			C2816	2.100
MGHCG-3	10B-1	15.875	30	24			9.3			C3024	2.100
MGHCG-4	12B-1	19.05	30	24			11.3			C3024	2.060
MGHCG-5	16B-1	25.4	45	40			16.5			C4540	2.060




MUCCG

Référence	ISO	Pas	W	H	K	L	h	A	S	Profil	Kg/m
MUCCG-1	08B-1	9.525	25	15	18	15	1.5	5.4	4.4	C2010	0.760
MUCCG-2	08B-1	12.7	30	25	27	20	2.2	7.4	7.2	C2812	1.100
MUCCG-3	10B-1	15.875	33	30	32	23	2.6	9.2	9.5	C2812	1.305
MUCCG-4	12B-1	19.05	38	35	50	28	2.4	11.3	11.1	C3818	2.335
MUCCG-5	16B-1	25.4	51	40	55	41	3.5	16.5	16.5	C3818	2.440



MTCGD


Référence	ISO	Pas	W	N	H	K	h	A	Profil	Kg/m
MTCGD-1	08B-2	9.525	15.5		10	12	1.5	5.4	C2010	0.615
MTCGD-2	08B-2	12.7	21.4	20	15	17	2.2	7.5	C2010	0.715
MTCGD-3	10B-2	15.875	25.7	20	15	17	2.6	9.3	C2812	1.165
MTCGD-4	12B-2	19.05	30.7	28	15	20	2.4	11.3	C2812	1.200
MTCGD-5	16B-2	25.4	48	38	20	27	3.5	16.5	C3818	1.170
MTCGD-6	20B-2	31.75	55	38	25	30	4.3	19	C3818	2.480
MTCGD-7	24B-2	38.1	72	38	30	35	5.5	24.7	C3818	3.020



Les guides chaînes et rails sont livrés en longueur de 2 mètres. Possibilité de réalisation de longueurs spéciales sur demande.


MGHLCG

Référence	ISO	Pas	W	N	H	K	I	J	h	d	D	C	Profil	Kg/m
MGHLCG-1	08B-1	9.525	20	29	17.5	21	5.6	8.7	9.9	4	6.6	9.3	C2010	0.622
MGHLCG-2	08B-1	12.7	28	24	27.5	32	7.6	11.5	12.7	5	8.7	12.8	C2812	1.450
MGHLCG-3	10B-1	15.875	28	24	27.5	32	9.3	13.5	14.8	6	10.4	15.4	C2812	1.402
MGHLCG-4	12B-1	19.05	38	38	34	43	11.5	15.9	17.5	7	12.3	16.9	C3818	1.709
MGHLCG-5	16B-1	25.4	38	38	40	50	16.9	25.7	26.8	9	16.1	24.4	C3818	1.600
MGHLCG-6	20B-1	31.75	60	60	45	55	19.4	29.3	31.2	11	19.3	27.5	C6020	4.800
MGHLCG-7	24B-1	38.1	60	60	55	65	25.2	38.2	40.1	16	25.7	36.5	C6020	5.000
MGHLCG-8	28B-1	44.45	60	70	70	80	30.8	46.9	48.9	17	28.3	41.5	C6020	6.200
MGHLCG-9	32B-1	50.8	60	70	70	80	30.8	47.3	53	19	29.6	44.5	C6020	6.200





MGHPCG

Référence	ISO	Pas	H	W	L	I	J	h	d	D	Profil	Kg/m
MGHPCG-1	08B-1	9.525	25	31	53	5.6	8.7	9.9	4	6.6	C15	2.340
MGHPCG-2	08B-1	12.7	25	31	53	7.6	11.5	12.7	5	8.7	C15	2.300
MGHPCG-3	10B-1	15.875	25	31	53	9.3	13.5	14.8	6	10.4	C15	2.250
MGHPCG-4	12B-1	19.05	25	31	53	11.5	15.9	17.5	7	12.3	C15	2.250

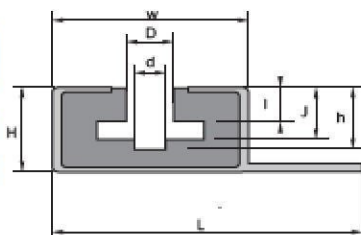


MGHGCG

Référence	ISO	Pas	H	W	L	I	J	h	d	D	Profil	Kg/m
MGHGCG-1	08B-1	9.525	25	31	47	5.6	8.7	9.9	4	6.6	C14	2.150
MGHGCG-2	08B-1	12.7	25	31	47	7.6	11.5	12.7	5	8.7	C14	2.150
MGHGCG-3	10B-1	15.875	25	31	47	9.3	13.5	14.8	6	10.4	C14	2.100
MGHGCG-4	12B-1	19.05	25	31	47	11.5	15.9	17.5	7	12.3	C14	2.080

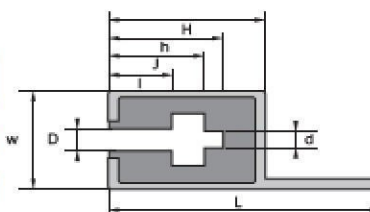


M2PCG

Référence	ISO	Pas	W	H1	H2	A	K	H	Profil	Kg/m
M2PCG-1	08B-1	9.525	20	31.6	19.05	14.5	28.4	26.4	C2010	0.900
M2PCG-2	08B-1	12.7	20	34.8	18.9	16.5	30.5	28	C2010	0.960
M2PCG-3	10B-1	15.875	20	41.1	21.2	15.5	36	34.4	C2010	1.120
M2PCG-4	12B-1	19.05	28	47.5	24.8	18.6	41.5	38.5	C2812	1.700
M2PCG-5	16B-1	25.4	38	69.4	45.1	25	61.4	52.4	C3818	3.100

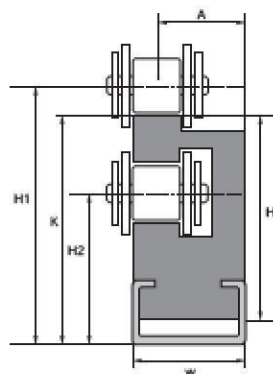

MHCG


Référence	W	N	K	H	h	Profil	Kg/m
MHCG-2006	20	24	6	4	0.8	C2405	0.350
MHCG-2011	20	24	11	9	5.8	C2405	0.450
MHCG-2014	20	20	14	10	4	C2010	0.790
MHCG-2017	20	20	17	15	7	C2010	0.880
MHCG-2022	20	20	22	20	12	C2010	0.940
MHCG-2815	28	28	15	10	3	C2812	1.180
MHCG-2818	28	28	18	15	6	C2812	1.320
MHCG-2824	28	28	24	20	12	C2812	1.488
MHCG-3822	38	38	22	12	4	C3818	2.200
MHCG-3824	38	38	24	20	7	C3818	2.460
MHCG-3830	38	38	30	20	12	C3818	2.690
MHCG-6030	60	60	30	20	10	C6020	3.260



GR

Références	H (mm)	20	25	30	35	40	45	50	60	70	80	90	100
GR.X2	2	0.86	1.12	1.33	1.59	1.77	2.02	2.20	2.63	3.10	3.53	3.96	4.39
GR.X3	3	1.33	1.64	2.02	2.28	2.63	3.01	3.31	3.96	4.65	5.30	5.98	6.59
GR.X5	5	2.20	2.76	3.31	3.87	4.39	4.99	5.51	6.59	7.71	8.78	9.90	10.98

.. = W




Les guides courroies et rails sont livrés en longueur de 2 mètres. Possibilité de réalisation de longueurs spéciales sur demande.




MCT

Référence	W	H	h	A	Kg/m
MCT-10Z	20	10	3	6.5	0.197
MCT-13A	20	12	5	8.0	0.232
MCT-15E	25	12	5	10.0	0.292
MCT-17B	30	15	8	10.5	0.429
MCT-22C	35	20	11	13.5	0.660
MCT-30D	40	25	13	19.0	0.944




MCTCG

Référence	W	H	h	K	A	Profil	Kg/m
MCTCG-10Z	20	15	3	17	6.5	C2010	0.787
MCTCG-13A	20	15	5	17	8.0	C2010	0.782
MCTCG-15E	25	20	5	24	10.0	C2812	1.352
MCTCG-17B	30	20	8	24	10.5	C2812	1.439
MCTCG-22C	38	25	11	32	13.5	C3818	2.265
MCTCG-30D	40	30	13	35	19.0	C3818	2.574




MCOR







Référence	D	W	H	h	Kg/m
MCOR-04	4	15	10	2.0	0.144
MCOR-05	5	15	10	2.5	0.140
MCOR-06	6	20	10	3.0	0.188
MCOR-08	8	20	10	4.0	0.175
MCOR-10	10	25	12	5.0	0.280
MCOR-12	12	25	12	6.0	0.244
MCOR-15	15	25	15	7.5	0.288
MCOR-20	20	30	20	10.0	0.442



MCORCG

Référence	D	W	H	h	K	Profil	Kg/m
MCORCG-04	4	20	10	2	14	C2010	0.680
MCORCG-05	5	20	10	2.5	14	C2010	0.675
MCORCG-06	6	20	10	3	14	C2010	0.660
MCORCG-08	8	20	10	4	14	C2010	0.650
MCORCG-10	10	28	15	5	18	C2812	1.179
MCORCG-12	12	28	15	6	18	C2812	1.160
MCORCG-15	15	28	15	7.5	18	C2812	1.160
MCORCG-20	20	28	20	10	24	C2812	1.280



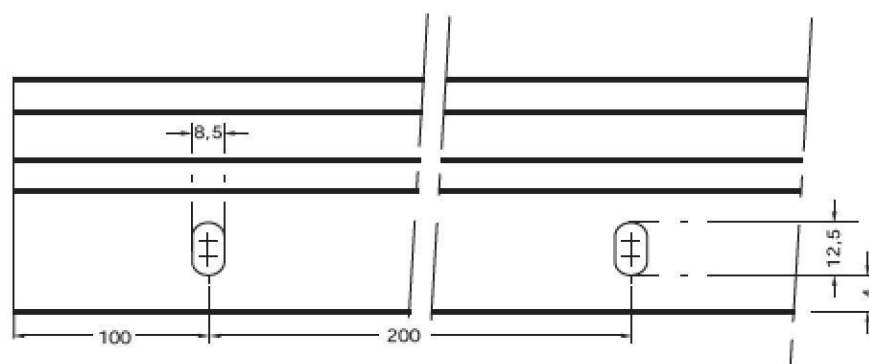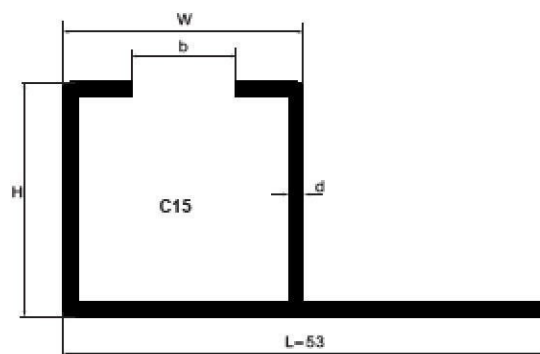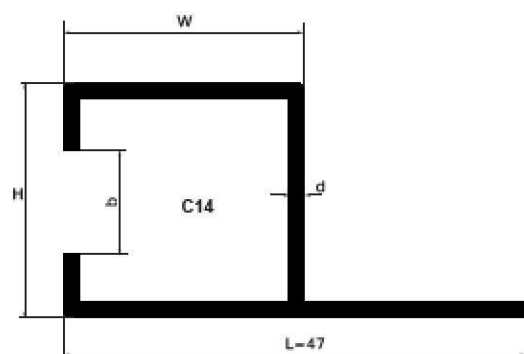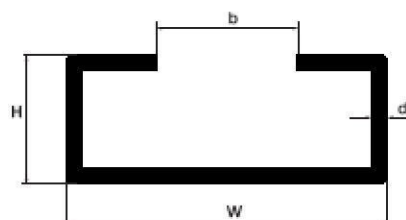

Poinçonnage du rail de fixation du profil C14 et C15.

Référence		W	H	b	d	Kg/m
GALVA	INOX					
C2405	C2405IN	24	5.2	17.5	1	0.28
C2010	C2010IN	20	10	10.0	1 / 1,5	0.43
C2812	C2812IN	28	12	14.0	2.2	0.95
C2816	C2816IN	28	16	14.0	2.3	1.15
C3818	C3818IN	38	18	22.0	1.5	0.98
C3024	C3024IN	30	24	20.0	1.5	0.94
C3818	C3818IN	38	18	22.0	2.5	1.43
C4540	C4540IN	45	40	31.0	2	2.05
C6020	C6020IN	60	20	36.0	2.5	2.16
C2815	C2815IN	28	15	12.0	2.3	1.15
C-14	C47IN / 31 / 25	31	25	20.0	2	1.20
C-15	C53IN / 31 / 25	31	25	20.0	2	1.20